



BQR



C.No TK2003-044


ISO 9001: 2000 QUALITY MANAGEMENT SYSTEM



ESKORT

MAKINA & MÜHENDİSLİK

OVERWRAPPING PACKING MACHINE

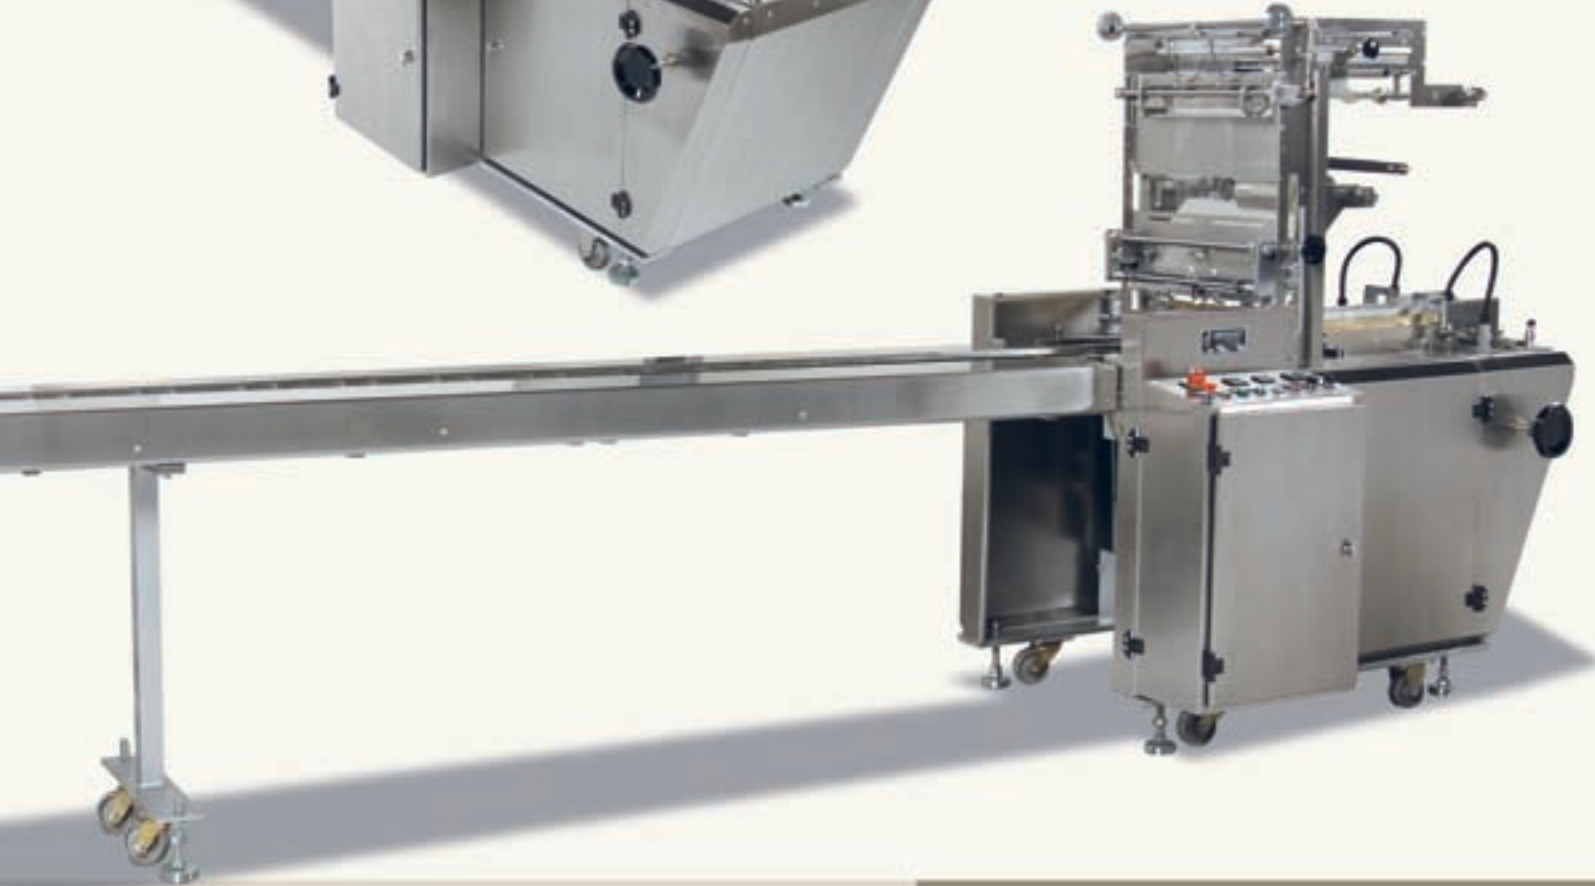




Technical Specifications

- Packing easy open system options
- Machine will be equipment with photocell.
- All stroke devices are adjustable.
- Electronic speed control.
- The packing is done by end folding heatsealing of the lengthseam at the bottom of the fold ends. Alternatively envelope wrapping at the bottom can be performed. It is possible to attach a tear type.
- The machine can be adjusted easily according to the size of product required.
- Round ,rectangular, square,oval shapes are packed in the best possible way.
- Sealing is done by heat .Working speed and thickness of cellophane can be adjusted according to product through heat thermostatic control.
- Stainless steel outside planking
- All machinery have one year guarantee.


Optional Parts

- PLC touchpoint control unit (optional).
- Date printer (optional).

Dimension

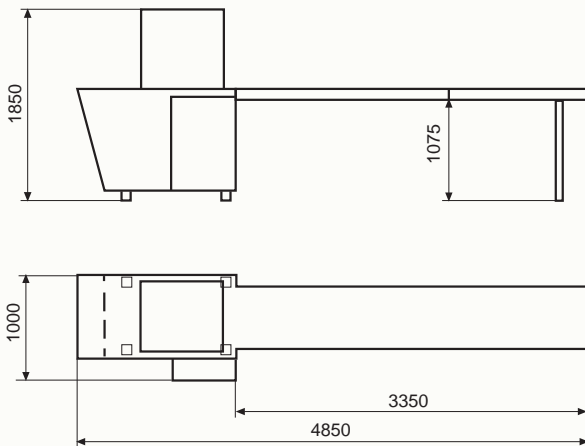

Packing Types

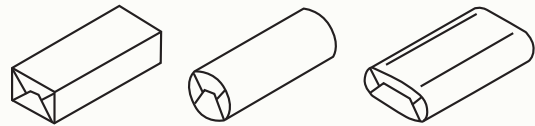

Type	ESK-OWP-01
Capacity	30-50 ppm
Round Biscuit	Ø 30-70 mm.
Restangular Biscuit	30-75 mm.
Peckage Length	50-300 mm.
Electrical Power	3 kW.
Weight	1100 kg.
Wrapping materials - Cellophane , PVC	Celephane,PVC
Wrapping dimensions	Max Ø 350x350